


Stabbing Guide, Standard Duty, Buckle Closure

Specifications

- Material: Urethane, Steel Components
- Color: Refer to Chart


Features

- Prevents damage to pipe threads during make up
- Steel core with urethane outer shell
- Removable and replaceable handles
- Buckle type closure
- Available for tubing, casing, and drill pipe connections
- Available in custom colors; additional fees may apply

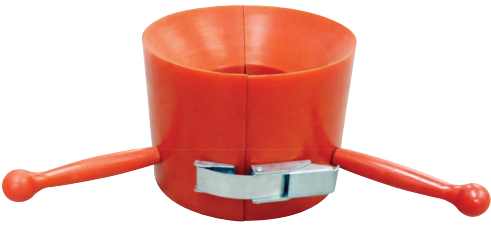

Item No.	Item Size	LBS / FT	Connection	Coupling / Tool Joint	Color	Interchangeable Connection
80532	3 1/2	-	BTC	4.313	ORANGE	-
80535	4 1/2	-	BTC	5	ORANGE	-
80533	5 1/2	-	BTC	6.05	ORANGE	-
80534	7	-	BTC	7.656	ORANGE	-
80537	9 5/8	-	BTC	10.625	ORANGE	-
80538	10 3/4	-	BTC	11.75	ORANGE	-
80536	13 3/8	-	BTC	14.375	ORANGE	-
80930	20	-	BTC	21	ORANGE	-
80842	1	-	CS	1.6	ORANGE	-
80448	1 1/4	-	CS	1.927	ORANGE	-
80449	1 1/2	-	CS	2.162	ORANGE	-
80894	1 1/2	-	CS	2.179	BLUE	-
80890	1 1/2	-	CS	2.179	ORANGE	-
80843	2 1/16	-	CS	2.46	ORANGE	-
80749	2 3/8	-	CS	2.7	ORANGE	-
80891	2 3/8	-	CS	2.75	ORANGE	-
80895	2 3/8	-	CS	2.75	BLUE	-
80371	2 7/8	-	CS	3.201	ORANGE	-
80877	2 7/8	6.5	CS	3.21	ORANGE	-
80775	3 1/2	9.3	CS	3.905	ORANGE	-
80715	5	-	DS50	6.625	ORANGE	-
80710	5 1/2	-	DS55	7	ORANGE	-
80719	6 5/8	-	DS65	8.4	ORANGE	-
80705	2 3/8	-	EUE	3.06	ORANGE	-
80917	2 3/8	-	EUE	3.063	ORANGE	-
80832	2 3/8	-	EUE	3.078	ORANGE	-
80716	2 3/8	-	EUE	3.08	ORANGE	-
80823	2 7/8	-	EUE	3.125	ORANGE	-
80826	2 7/8	-	EUE	3.48	ORANGE	-
80869	2 7/8	-	EUE	3.46	BLUE	-
80717	2 7/8	-	EUE	3.5	ORANGE	-
80872	2 7/8	6.5	EUE	3.67	ORANGE	-
80967	2 7/8	-	EUE	3.67	ORANGE	-
80788	2 7/8	-	EUE	3.668	ORANGE	-
81046	3 1/2	9.3	EUE	4.18	BLUE	-
80968	3 1/2	-	EUE	4.5	ORANGE	-
80333	4 1/2	-	EUE	5	ORANGE	-
80969	4 1/2	-	EUE	5.56	ORANGE	-
80313	4	-	FH	5.25	ORANGE	-
80339	4	-	FH	5.5	ORANGE	-
80675	4	-	FH	5.375	ORANGE	-
80212	4	-	FH	6.25	ORANGE	-
80745	4 1/2	-	FH	6.25	ORANGE	-
80391	5	-	FH	5.25	ORANGE	-
80735	5 1/2	-	FH	6.625	ORANGE	-
80602	5 1/2	-	FH	7	ORANGE	-
80408	5 1/2	-	FH	7.25	ORANGE	-
80966	6 5/8	-	FH	8	ORANGE	-
80789	6 5/8	-	FH	8.25	ORANGE	-
80505	6 5/8	-	FH	8.5	ORANGE	-
80874	5	-	GPDS50	6.625	ORANGE	-
80409	5 1/2	-	HT55	7.25	ORANGE	-
80750	5 1/2	-	HT55	7	ORANGE	-
81388	2 7/8	-	HTPAC	3.125	ORANGE	-
80573	3 1/2	-	IF	4.5	ORANGE	-
80299	3 1/2	-	IF	4.75	ORANGE	-

STABBING GUIDES

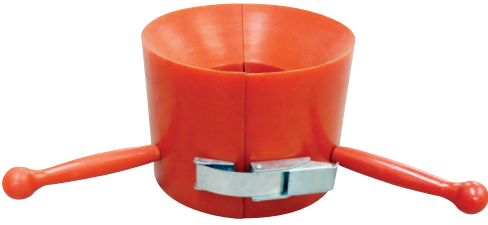

Stabbing Guide, Standard Duty, Buckle Closure

Specifications

- Material: Urethane, Steel Components
- Color: Refer to Chart

Features

- Prevents damage to pipe threads during make up
- Steel core with urethane outer shell
- Removable and replaceable handles
- Buckle type closure
- Available for tubing, casing, and drill pipe connections
- Available in custom colors; additional fees may apply

Item No.	Item Size	LBS / FT	Connection	Coupling / Tool Joint	Color	Interchangeable Connection
80706	3 1/2	-	IF	4.875	ORANGE	-
80696	3 1/2	-	IF	5	ORANGE	-
80698	4 1/2	-	IF	6.25	ORANGE	NC50, 5 XH
80305	4 1/2	-	IF	6.375	ORANGE	NC50, 5 XH
80311	4 1/2	-	IF	6.5	ORANGE	NC50, 5 XH
80307	4 1/2	-	IF	6.625	ORANGE	NC50, 5 XH
81089	4 1/2	-	IF	6.625	BLUE	NC50, 5 XH
80781	4 1/2	-	IF	6.75	ORANGE	NC50, 5 XH
80332	4 1/2	-	IF	6.875	ORANGE	NC50, 5 XH
80767	4 1/2	-	LTC	5	ORANGE	-
81181	5 1/2	-	LTC	6.05	ORANGE	-
80893	5 1/2	-	LTC	6.111	BLUE	-
81066	7	-	LTC	7.625	ORANGE	-
80870	7	-	LTC	7.656	BLUE	-
80916	9 5/8	-	LTC	10.625	ORANGE	-
80670	2 3/8	5.95	PH6	2.905	ORANGE	-
80844	2 3/8	-	PH6	2.906	RED	-
80896	2 3/8	-	PH6	2.906	BLUE	-
80810	2 3/8	-	PH6	2.906	ORANGE	-
80834	2 7/8	-	PH6	3.438	ORANGE	-
80897	2 7/8	-	PH6	3.438	BLUE	-
80774	2 7/8	8.7	PH6	3.5	ORANGE	-
80835	2 7/8	-	PH6	3.5	ORANGE	-
80776	3 1/2	12.95	PH6	4.313	ORANGE	-
80761	4 1/2	-	REG	6.5	ORANGE	-
81150	6 5/8	-	REG	8	ORANGE	-
80506	6 5/8	-	REG	8.25	ORANGE	-
81155	3 1/2	9.2	TSH 511	3.5	GREEN	-
80920	3 1/2	9.2 - 12.7	TSH 563	4.25	GREEN	-
80921	4 1/2	11.6 - 13.5	TSH 563	5.2	GREEN	-
80909	6 5/8	24	TSH 521	7.39	ORANGE	-
80937	7	26	TSH 563	7.656	GREEN	-
80922	7 5/8	26.4 - 33.7	TSH 563	8.5	GREEN	-
80923	9 5/8	36 - 53.5	TSH 563	10.625	GREEN	-
80936	9 5/8	40	TSH 521	9.957	GREEN	-
80908	9 5/8	53.5	TSH 563	10.625	ORANGE	-
80919	13 3/8	54.5 - 72	TSH 563	14.375	GREEN	-
80924	10 3/4	45.5 - 51	TSH 563	11.75	GREEN	-
80778	4	-	TT390	4.875	ORANGE	-
80779	5 7/8	-	TT585	7	ORANGE	-
80515	4 1/2	-	XH	6	ORANGE	-
80286	4 1/2	-	XH	6.25	ORANGE	-
80306	4 1/2	-	XH	6.5	ORANGE	-
80787	5 1/2	-	XH	6.625	ORANGE	-
80672	3 1/2	-	XT38	4.75	ORANGE	-
80221	4	-	XT39	4.875	ORANGE	-
80676	4	-	XT39	5	ORANGE	-
80783	4	-	XT39	5	BLACK	-
80503	4	-	XT39	6.25	ORANGE	-
80609	4	-	XT50	6.5	ORANGE	-
80518	5 1/2	-	XT54	6.625	ORANGE	-
80517	5 1/2	-	XT54	6.75	ORANGE	-
80901	5 7/8	-	XT57	6.75	ORANGE	-
80500	5 7/8	-	XT57	7	ORANGE	-
80782	5 7/8	-	XT57	7.25	ORANGE	-
80878	6 5/8	-	XT65	8	ORANGE	-
80669	4 1/2	-	XTM43	5.25	ORANGE	-


Stabbing Guide, Standard Duty, Magnetic Latch Closure

Specifications

- Material: Urethane, Steel Components
- Color: Refer to Chart

Features

- Prevents damage to pipe threads during make up
- Steel core with urethane outer shell
- Removable and replaceable handles
- Magnetic closure; double magnetic closure also offered
- Available for tubing, casing, and drill pipe connections
- Available in custom colors; additional fees may apply

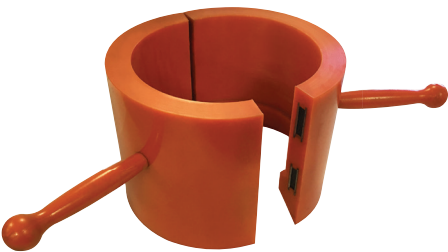

Item No.	Item Size	LBS / FT	Connection	Interchangeable Connection	Coupling / Tool Joint OD	Color
81111	5 1/2	-	BTC	-	6.05	ORANGE
80955	4 1/2	-	CDC-HTQ	-	5.3	BLUE
80852	5 1/2	-	CDC-HTQ	-	6.3	ORANGE
80954	7	-	CDC-HTQ	-	7.9	BLUE
80838	4	-	CET39	-	4.875	MAROON
81407	4	-	CET43	-	5.375	ORANGE
81432	5	-	CET50	-	6.625	MAROON
81403	5 1/2	-	CET54	-	6.625	MAROON
81434	5 7/8	-	CET57	-	7	MAROON
81071	1 1/2	3.64	CS	-	2.162	ORANGE
81433	1 1/2	4.19	CS	-	2.179	ORANGE
81175	2 3/8	-	CS	-	2.7	ORANGE
81272	2 7/8	6.5	CS	-	3.21	ORANGE
81405	2 7/8	-	CS	-	3.22	ORANGE
81273	3 1/2	9.3	CS	-	3.915	ORANGE
81379	2 3/8	-	EUE	-	2.91	ORANGE
81218	2 3/8	-	EUE	-	3.06	ORANGE
81380	2 7/8	-	EUE	-	3.46	ORANGE
81318	2 7/8	-	EUE	-	3.668	ORANGE
81381	3 1/2	-	EUE	-	4.18	ORANGE
81149	4	-	FH	-	5.25	ORANGE
81070	5 1/2	-	HT55	-	7	ORANGE
81042	4	-	IF	NC46, 4 1/2 XH	6.5	MAROON
80871	4 1/2	-	IF	NC50, 5 XH	6.625	ORANGE
81072	2 1/16	-	IJ 10 RD	-	2.315	ORANGE
81274	2 3/8	5.95	PH6	-	2.906	ORANGE
81430	2 7/8	-	PH6	-	3.302	ORANGE
81171	2 7/8	7.9	PH6	-	3.438	ORANGE
81437	2 7/8	8.7	PH6	-	3.5	ORANGE
81172	3 1/2	12.95	PH6	-	4.313	ORANGE
81151	6 5/8	-	REG	-	8	ORANGE
81057	4 1/2	-	STC	-	5	ORANGE
81055	5	-	STC	-	5.563	ORANGE
81056	5 1/2	-	STC	-	6.05	ORANGE
81153	2 3/8	4.6	TSH 511	-	2.406	GREEN
81154	2 7/8	6.4	TSH 511	-	2.875	GREEN
81219	4	11	TSH 511	-	4	ORANGE
80939	5 1/2	15.5	TSH 511	-	5.535	GREEN
80935	4 1/2	12.6 - 13.5	TSH 521	-	4.759	GREEN
80938	5 1/2	17	TSH 521	-	5.761	GREEN
80940	3 1/2	9.2 - 12.7	TSH 563	-	4.25	GREEN
80941	4 1/2	11.6 - 13.5	TSH 563	-	5.2	GREEN
80882	4	-	XT39	-	5	ORANGE

STABBING GUIDES



Stabbing Guide, Heavy Duty, Quick-Lock Bolt Closure

Specifications

- Material: Polyurethane, Steel Components
- Color: Black

Features

- Prevents damage to pipe threads during make up
- Steel core with polyurethane outer shell
- Removable and replaceable handles
- Large, quick-lock bolt closure for maximum durability
- Available for tubing, casing, and drill pipe connections
- Ideal for offshore applications

Item No.	Item Size	Connection	Interchangeable Connection	Coupling / Tool Joint OD
80587	7	BTC	-	7.656
80588	9 5/8	BTC	-	10.625
80589	13 3/8	BTC	-	14.375
80712	5	DS50	-	6.625
80711	5 1/2	DS55	-	7
81228	5 1/2	DS55	-	7.125
81229	6 5/8	DS65	-	8.125
81298	6 5/8	DS65	-	8.375
80769	4	FH	-	5.25
80770	4	FH	-	5.5
80295	5 1/2	FH	-	7.25
80527	5 1/2	FH	-	7.5
80603	5 1/2	FH	-	7
80699	6 5/8	FH	-	8
80689	6 5/8	FH	-	8.25
80281	6 5/8	FH	-	8.5
81230	6 5/8	FH	-	8.688
80730	5	GPDS	-	6.625
80728	6 5/8	GPDS	-	8.5
80729	5 7/8	GPDS	-	7
80600	5 1/2	GPDS50	-	6.625
80601	5 1/2	GPDS55	-	7.25
81311	5	HT50	-	6.625
80550	5 1/2	HT55	-	7
81048	5 1/2	HT55	-	7.125
81246	5 1/2	HT55	-	7.25
80702	2 7/8	HTPAC	-	3.125
80688	2 3/8	HTPAC	-	3.375
80701	2 7/8	HTPAC	-	3.5
81047	2 3/8	IF	-	3.375
80572	3 1/2	IF	-	4.5
80570	3 1/2	IF	-	4.75
81038	3 1/2	IF	-	4.875
81037	3 1/2	IF	-	4.9375
80571	3 1/2	IF	-	5
80370	4	IF	NC46, 4 1/2 XH	6.25
80377	4 1/2	IF	NC50, 5 XH	6.375
80539	4 1/2	IF	NC50, 5 XH	6.5
80348	4 1/2	IF	NC50, 5XH	6.625
80700	4 1/2	IF	NC50, 5 XH	6.75

Stabbing Guide, Heavy Duty, Quick-Lock Bolt Closure

Specifications

- Material: Polyurethane, Steel Components
- Color: Black

Features

- Prevents damage to pipe threads during make up
- Steel core with polyurethane outer shell
- Removable and replaceable handles
- Large, quick-lock bolt closure for maximum durability
- Available for tubing, casing, and drill pipe connections
- Ideal for offshore applications



Item No.	Item Size	Connection	Interchangeable Connection	Coupling / Tool Joint OD
80855	7	LTC	-	7.6875
80531	2 3/8	PH6	-	2.908
80369	2 7/8	PH6	-	3.438
80530	2 7/8	PH6	-	3.5
80585	6 5/8	REG	-	8
80586	7 5/8	REG	-	9.5
81358	4	SLHT	-	4.5
80556	4 1/2	TM250	-	6.625
80584	5 1/2	TSDS50	-	6.625
81245	5 7/8	TT585	-	7
80854	4 1/2	XH	-	5.5
80459	4 1/2	XH	-	6.5
81201	3 1/2	XT38	-	4.75
80526	4	XT39	-	4.875
81322	4	XT39	-	5.5
80881	5	XT50	-	6.625
80898	5 1/2	XT54	-	6.625
80288	5 7/8	XT57	-	7
81222	5 7/8	XT57	-	7.25



WITHSTANDS THE TOUGHEST HANDLING CONDITIONS | UK RENTAL OPTIONS AVAILABLE